

TF4X40 Thermostat

Ordinary Location Thermostats

UL:
Ordinary (Unclassified) Locations

CSA:
Ordinary (Unclassified) Locations

Applications

- TF4X40 thermostat is used for controlling heat tracing systems in ordinary (unclassified) locations.

Features

- Enclosure: Molded Fiberglass Polyester
- Classifications: NEMA Type 4X IP66
- Temperature Range:
 - Fixed Range: 4.4°C (40°F)
- Exposure: -40°C to 71°C (-40°F to +160°F)
- Capillary Length: 0.9 m (3 ft)
- Material: Tin Plated Copper
- Maximum Bulb Temperature: +71°C (+160°F)
- Electrical Data: CSA Rating
- 22 Amp Resistance 480 Vac: UI Rating
- Calibration Accuracy: +2.2°C (+4°F)
- Switch Type: Single Pole Single Throw

Certifications and Compliances


- UL Listed: E89748
- CSA Listed: LR52088-4



CONTROL AND MONITORING SYSTEMS: THERMOSTATS

NELSON™

Dimensions in Millimeters (Inches)

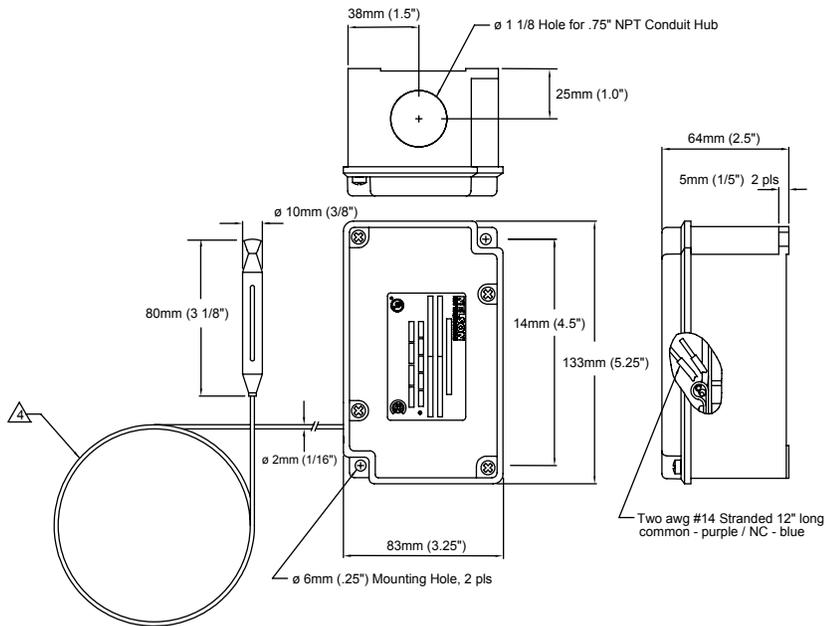

TF4X40 Thermostat

Ordinary Location Thermostats


UL:
Ordinary (Unclassified) Locations

CSA:
Ordinary (Unclassified) Locations

Annual Maintenance

1. Remove cover.
2. Spray a coat of lubricant and rust preventative such as CRC Store and Lube, electrical grade, on the thermostat body.
3. Replace cover.

Installation

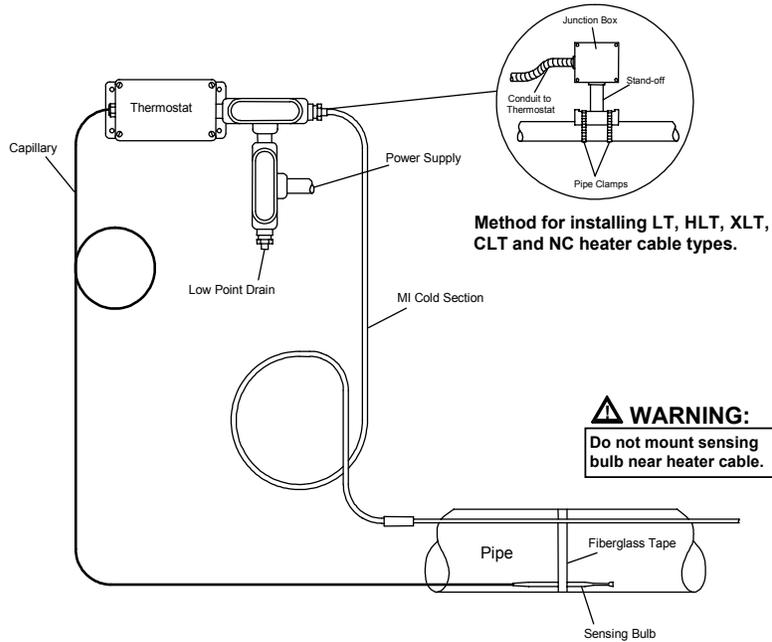

Wiring Diagram

